

Audiometer AT700




- PC-driven audiometer
- Comfortable audiometry board with dB-slideinterrupter-, frequency-, take over and return key with integrated PC keyboard
- Outstanding user guidance
- Integrated database for patient- and measurement data
- Fade-in of the old measurement curve into the current measurement

Auritec Medizindiagnostische Systeme GmbH
Dernauer Straße 12, 22047 Hamburg
Tel.: 040 / 69 65 40 -0
e-mail: vertrieb@auritec.de
Internet: www.auritec.de

AURITEC

Audiometer AT700

- Separate calibration levels for each test signal and frequency
- Online presentation of all audiometric procedures
- Recording of second measurement row for all transducers in one audiogram possible
- Speech audiometry measurement with integrated activation of the language tests from hard drive
- Up to 3 independent measurement channels with mixing function
- High-tone-audiometry
- Network and database access, im- und export via BDT/GDT interface

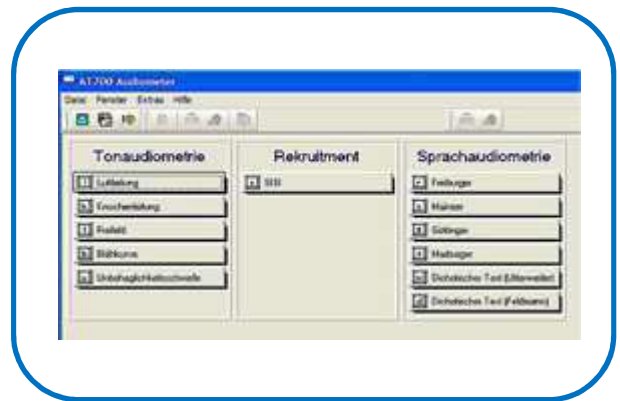

technical data

Frequencies for Pure Tone Audiometry

- Standard: 125 Hz bis 8000 Hz

Masking signal

- Narrow band for pure tone masking e (=TVR)
- Broad band (white noise) (=BB-noise)
- Speech weighted noise (=SVR)

Outputs:

- Air conductor HDA280
- Bone conductor B-71
- Freefield right and left
- Listening-in device to be used during the speech audiometry

• **Class II** for Pure Tone after DIN EN 60645-1

Class B-E for speech audiometry after DIN EN 60645-2